

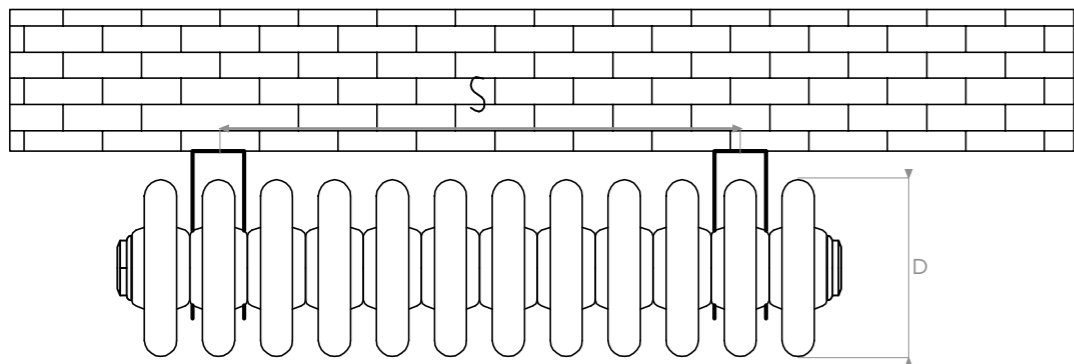
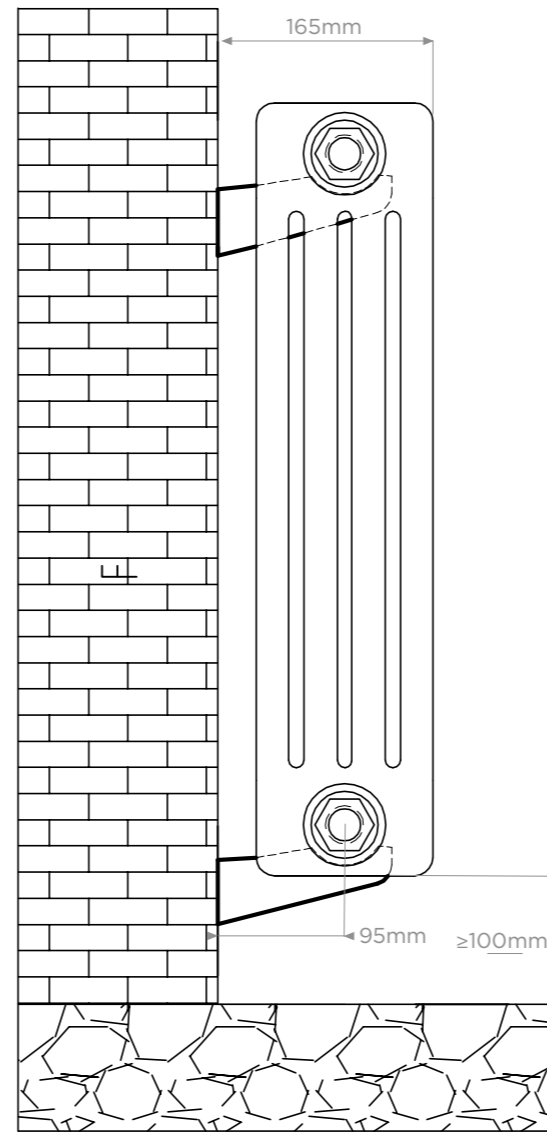


ALL MEASUREMENTS ARE IN MILLIMETRES | MANUFACTURED FROM MILD STEEL

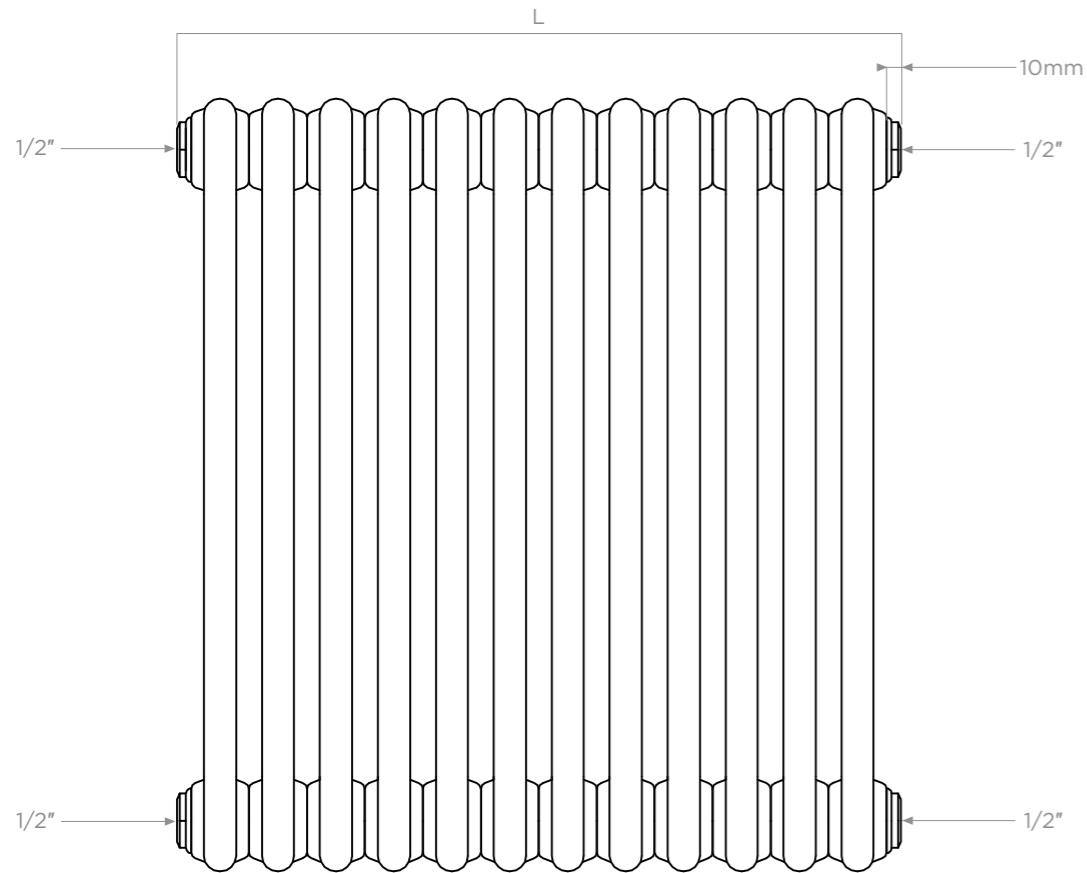

All Dimensions are in mm
 Max. Working Pressure: 6 Bar
 Max. Working Temperature: 95° C
 Inlet / Outlet : 1/2" BSP
 Fuel Type: H

Fitting Position:



PRODUCT CODE	HEIGHT (H) mm	LENGTH (L) mm	DEPTH (D) mm	PIPE CENTRES (C) mm	BRACKET CENTRES	
					F mm	S mm
C4030919	300	864	140	954	220	664
C4031125	300	1130	140	1220	220	842
C4031432	300	1440	140	1530	220	1152
C4040613	400	598	140	688	320	398
C4040716	400	731	140	821	320	531
C4040919	400	864	140	954	320	664
C4040922	400	997	140	1087	320	709
C4041125	400	1130	140	1220	320	842
C4041432	400	1440	140	1530	320	1152
C4050613	500	598	140	688	420	398
C4050716	500	731	140	821	420	531
C4050919	500	864	140	954	420	664
C4050922	500	997	140	1087	420	709
C4051125	500	1130	140	1220	420	842
C4051432	500	1440	140	1530	420	1152
C4060409	600	421	140	511	520	221
C4060613	600	598	140	688	520	398
C4060716	600	731	140	821	520	531
C4060919	600	864	140	954	520	664
C4060922	600	997	140	1087	520	709
C4061125	600	1130	140	1220	520	842
C4061432	600	1440	140	1530	520	1152
C4070409	750	421	140	511	670	221
C4070613	750	598	140	688	670	398
C4070716	750	731	140	821	670	531
C4070919	750	864	140	954	670	664
C4070922	750	997	140	1087	670	709
C4071125	750	1130	140	1220	670	842