

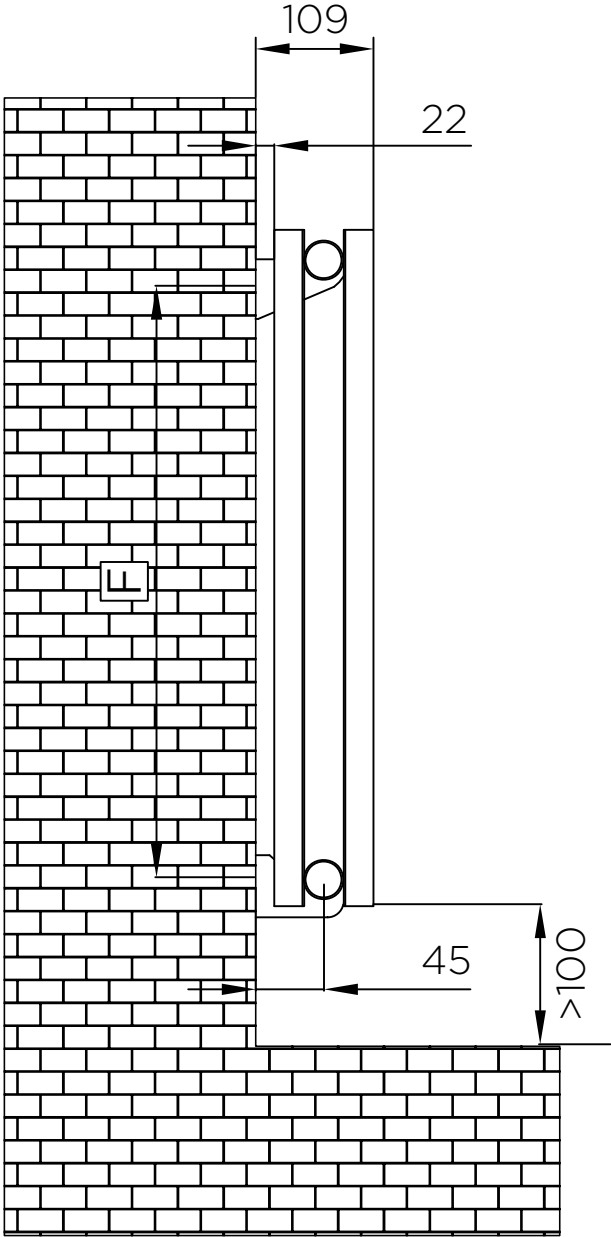
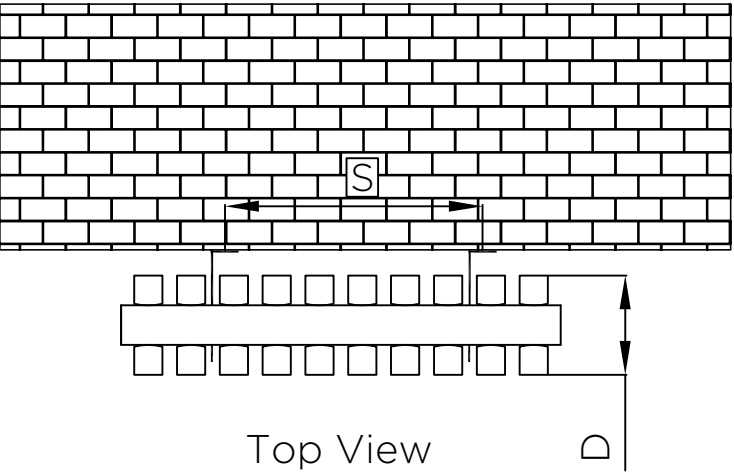
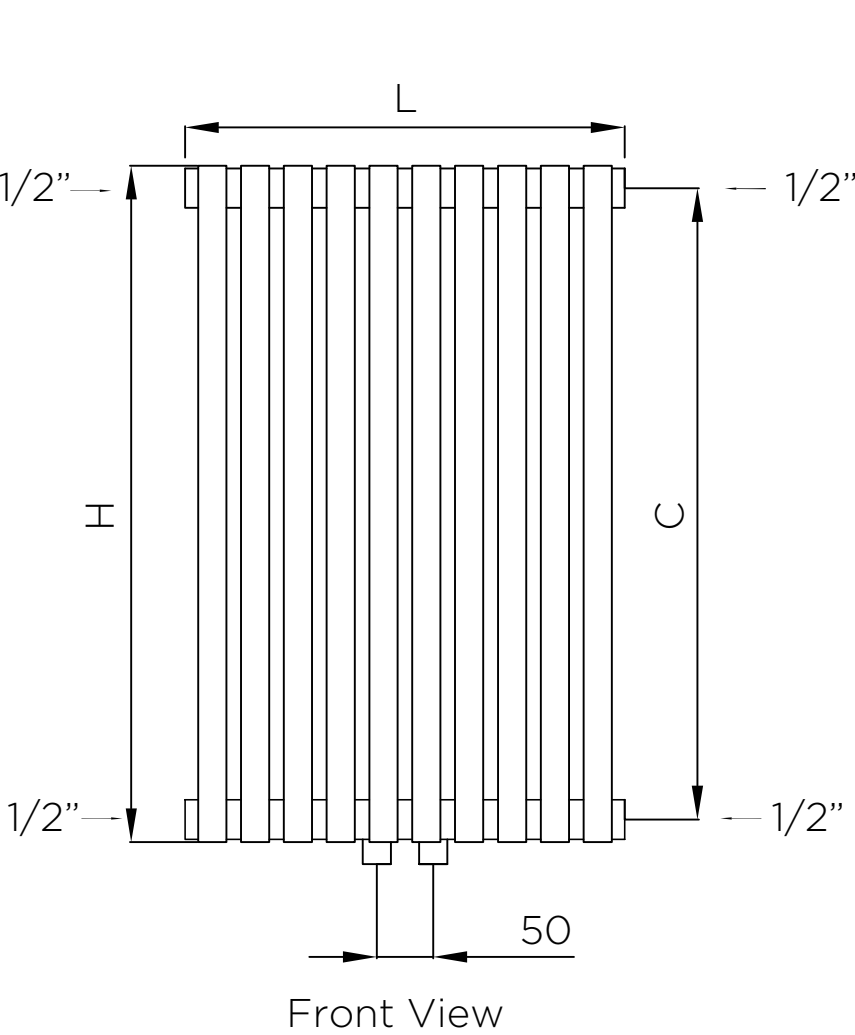


ALL MEASUREMENTS ARE IN MILLIMETRES    MANUFACTURED FROM MILD STEEL

DOUBLE



Installation Accessories:

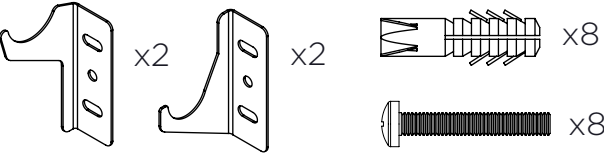

When mounting vertically, please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

All Dimensions are in mm  
Max.Working Pressure = 6 Bar  
Max.Working Temperature=95° C  
Inlet / Outlet : 1/2" BSP  
Fuel: E/H/D

| PRODUCT CODE | HEIGHT (H)<br>mm | LENGTH (L)<br>mm | DEPTH (D)<br>mm | PIPE CENTRES (C1-C)<br>mm | BRACKET CENTRES |         |
|--------------|------------------|------------------|-----------------|---------------------------|-----------------|---------|
|              |                  |                  |                 |                           | F<br>mm         | S<br>mm |
| KD1506       | 1500             | 231              | 87              | 50-321                    | 1431            | 152     |
| KD1510       | 1500             | 383              | 87              | 50-473                    | 1431            | 228     |
| KD1514       | 1500             | 535              | 87              | 50-625                    | 1431            | 380     |
| KD1806       | 1800             | 231              | 87              | 50-321                    | 1731            | 152     |
| KD1810       | 1800             | 383              | 87              | 50-473                    | 1731            | 228     |
| KD1812       | 1800             | 459              | 87              | 50-549                    | 1731            | 304     |
| KD1814       | 1800             | 535              | 87              | 50-625                    | 1731            | 380     |
| KD2014       | 2000             | 535              | 87              | 50-625                    | 1931            | 380     |